


SLICE[®] 135 QUICK START GUIDE


***SAFETY: ALWAYS TURN OFF POWER AND DISCONNECT THE AIR LINES BEFORE INVESTIGATING JAMS OR INTERNALS ISSUES. NEVER PLACE FINGERS, HANDS, OR TOOLS INTO THE MACHINE WHILE IT IS PLUGGED IN OR AIR CONNECTED.**




1. CONNECT AIRLINE, SET AT 80 PSI.

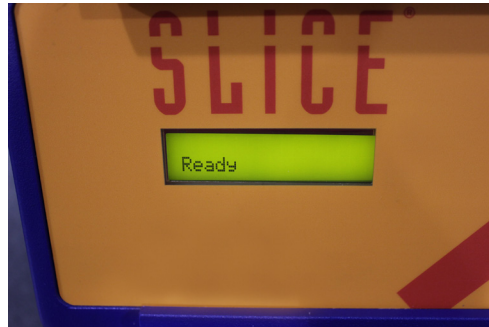


2. TURN ON SWITCH LOC. IN REAR OF MACHINE.

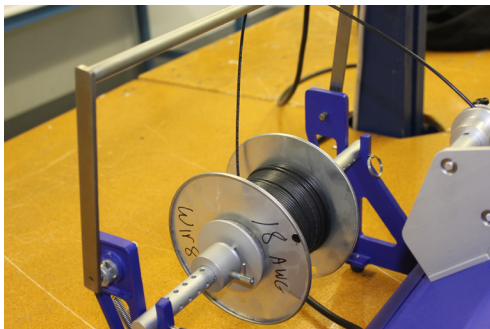


3. LOAD THE REEL SO THAT THE MATERIAL DE-REELS FROM THE BACK AND GOES OVER THE TOP OF THE SPRING-LOADED TENSIONER. MINIMUM/NO TENSION AT ALL SHOULD BE USED FOR FLEXIBLE TUBING THAT WILL STRETCH.

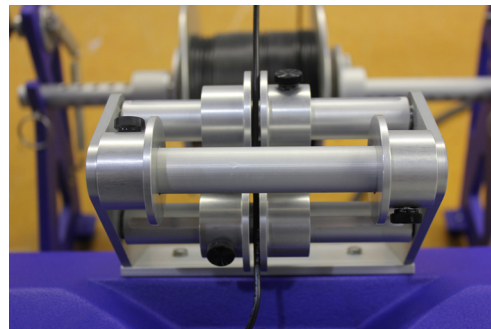


4. ADJUST TOP ROLLER GUIDE WITH MATERIAL INSERTED. MATERIAL MUST BE CENTERED.

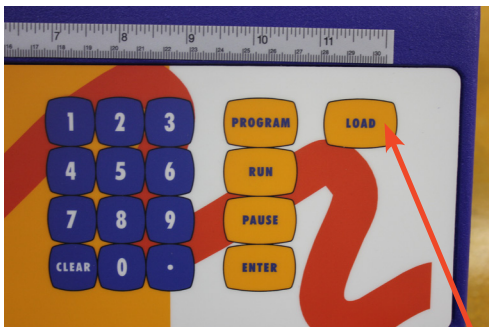


5. TO LOAD MATERIAL, PRESS "LOAD" BUTTON. MATERIAL WILL INDEX AND COMPLETE ONE CUT CYCLE.

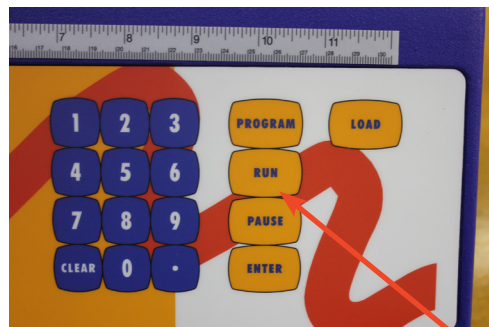


6. TO RUN MATERIAL, PRESS "RUN" BUTTON.

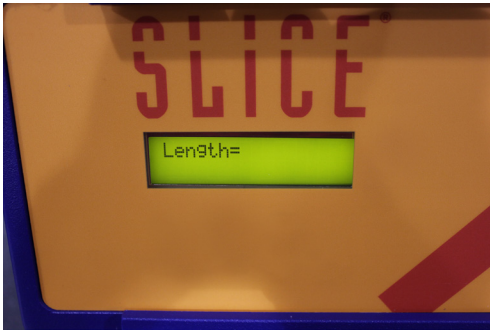


7. LCD WILL SHOW "LENGTH", ENTER LENGTH.

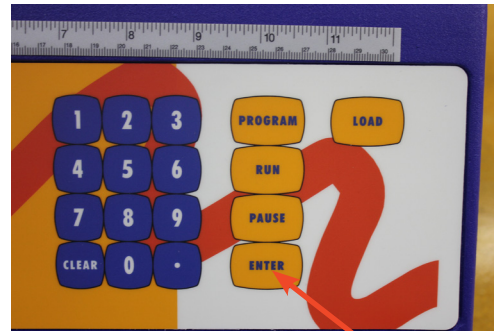

8. THEN PRESS "ENTER" BUTTON.

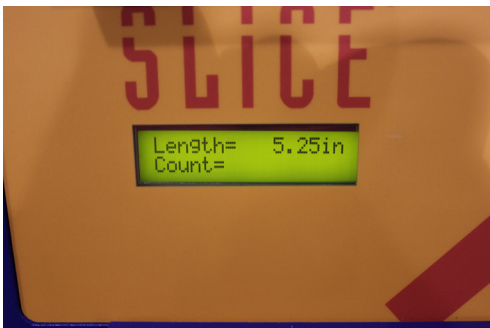

9. LCD WILL SHOW "COUNT" ENTER QTY. THEN PRESS "ENTER" KEY (SEE PIC 8).

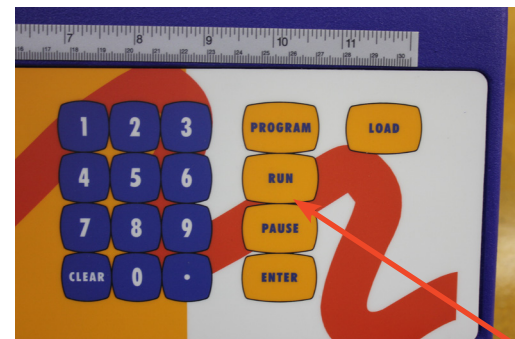

10. TO RUN, PRESS "RUN" KEY. MATERIAL WILL THEN BEGIN DESIRED MEASURING AND CUTTING PROCESS.

***SEE MANUAL FOR ALL SAFETY INFORMATION**

www.amtiproducts.com
847.588.7090