


THE SHRINK™ QUICK START GUIDE

***SAFETY: ALWAYS TURN OFF POWER BEFORE INVESTIGATING JAMS OR INTERNAL ISSUES. NEVER PLACE FINGERS, HANDS, OR TOOLS INTO THE MACHINE WHILE IT IS PLUGGED IN.**




1. NEMA PLUG, STYLE L6-20, TURN-LOCK, 250-20AH.

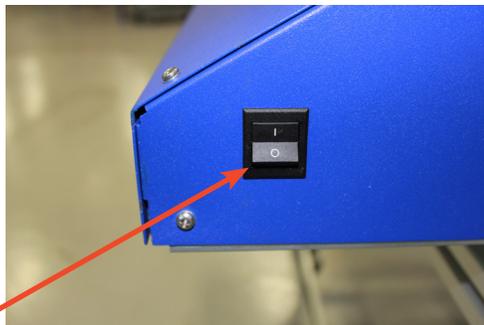

2. ON-OFF SWITCH LOCATED ON RIGHT-HAND SIDE.




3. LCD READOUT SHOWING HEATING SYSTEMS OFF.

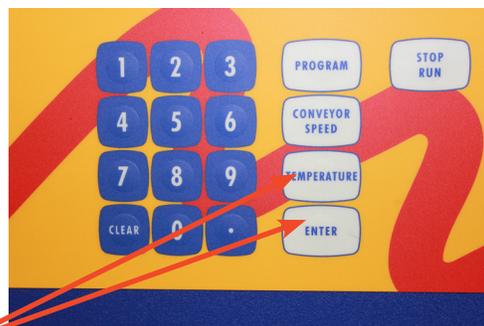

4. TEMP: PRESS "TEMP" BUTTON AND KEY IN DESIRED TEMP, THEN PRESS "ENTER" BUTTON.




5. TEMP IS SET @ 250 DEG. F. WILL TAKE TIME TO RAMP UP TO TEMP.

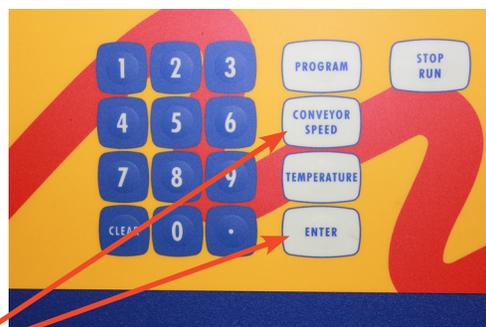

6. CONVEYOR SPEED: PRESS "CONVEYOR SPEED" BUTTON, KEY IN DESIRED SPEED, THEN PRESS "ENTER".



8. CONVEYOR SPEED SET AT 100 INCHES/MIN.

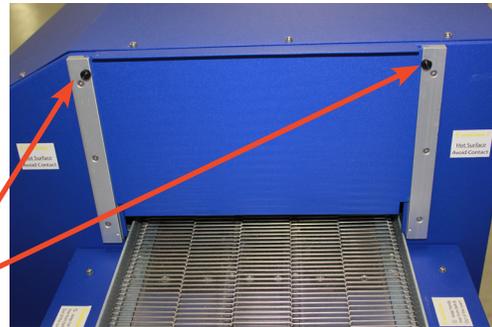


9. ADJUST ENTRANCE & EXIT DOORS (W/ THUMBSCREWS) FOR DESIRED OPENING HEIGHT.



10. TO SHUT DOWN HEATERS: PRESS TEMP BUTTON AND ENTER "0" THEN PRESS ENTER BUTTON.



11. TO STOP CONVEYOR: PRESS "RUN/STOP" BUTTON AND CONVEYOR WILL STOP.

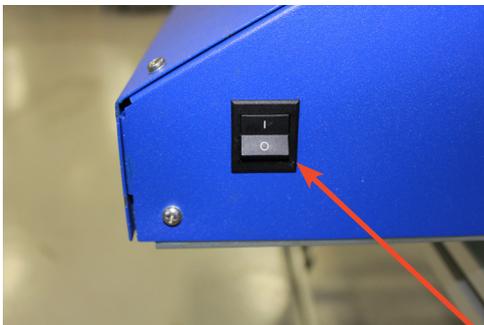

NOTE: SHRINK OVEN WILL AUTOMATICALLY SHUT DOWN IN APPROXIMATELY 5 MINUTES OR YOU CAN PRESS THE "ON/OFF" SWITCH TO OFF WHEN TEMP SHOWS 200 DEGREES.

***SEE MANUAL FOR ALL SAFETY INFORMATION**

www.amtiproducts.com
847.588.7090