

SLICE[®] 123 QUICK START GUIDE



***SAFETY: ALWAYS TURN OFF POWER BEFORE INVESTIGATING JAMS OR INTERNAL ISSUES. NEVER PLACE FINGERS, HANDS, OR TOOLS INTO THE MACHINE WHILE IT IS PLUGGED IN.**




1. CONNECT POWER CABLE.




2. TURN ON SWITCH LOCATED IN BACK.




3. MACHINE WILL SAY "Ready".

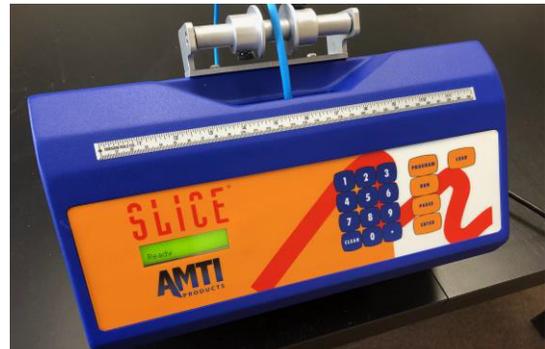

4. ADJUST TOP ROLLER GUIDE WITH MAETRAIL INSERTED. **MATERIAL MUST BE CENTERED.**

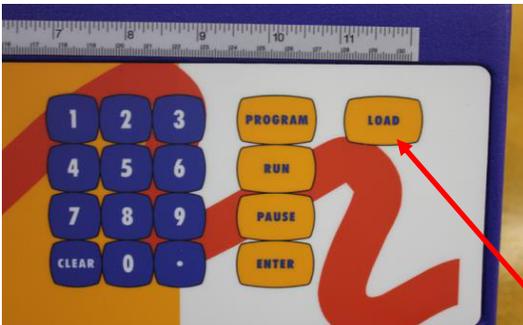


5. TO LOAD MATERIAL, PRESS "LOAD" BUTTON. MATERIAL WILL INDEX AND COMPLETE ONE CUT CYCLE.

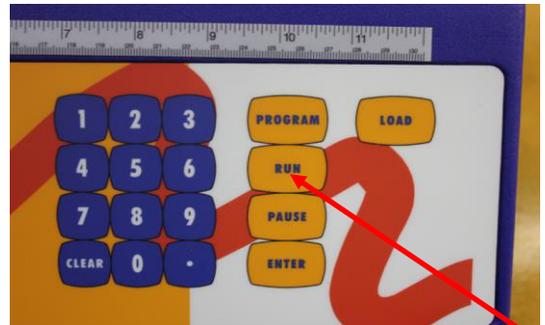

6. TO RUN MATERIAL "RUN" BUTTON.




7. LCD WILL SHOW "LENGTH=", USING THE KEYPAD, ENTER LENGTH.

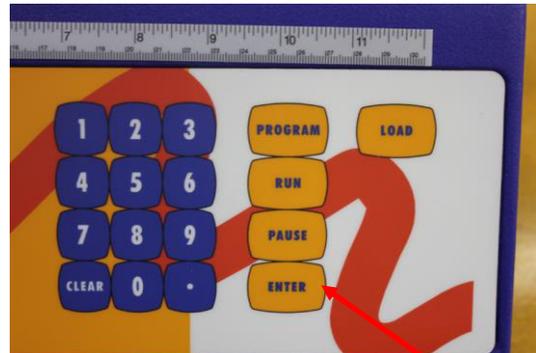

8. THEN PRESS THE "ENTER" BUTTON



9. LCD WILL SHOW "Count=". ENTER RUN QUANTITY AND PRESS "ENTER" ON THE KEYPAD.

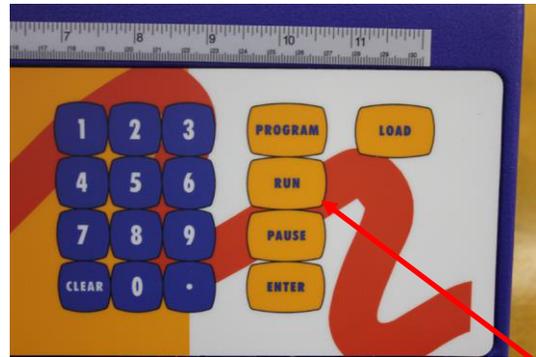

10. TO RUN, PRESS THE "RUN" KEY. MATERIAL WILL THEN BEGIN DESIRED MEASURING AND CUTTING PROCESS.

SEE MANUAL FOR ALL SAFETY INFORMATION

www.amtiproducts.com

847.588.7090