



Multi-Cut System™

Available for SLICE® 123 and 135 Only

- Increase efficiency, output and production
- Facilitates multiple-line cutting of up to 3-5 reels of material at the same time
- Guide assembly – choice of 3 or 5-Hole Aluminum Throat Guide
- Aluminum extrusion construction




THE SHRINK™

Heat Shrink Conveyor Tunnel Oven

- Accurate Digital Speed Control
- Electronic Temperature Control
- Turbulent Air Flow system for fast processing
- Operating Oven Temperature Range: 100° F to 350° F
- Conveyor Speed: 1 to 100 inches per minute

SLICE® PRODUCT TECHNICAL SPECIFICATIONS

Technical Data	123	135	141/142	150
Adustable Opening	No	No	Yes	Yes
Opening Width	3"	3"	3"	3"
Opening Height	0.25"/fixed	0.25"/fixed	1.5" max/adj.	1.5" max/adj.
Programmable	Yes- 99 programs	Yes- 99 programs	Yes- 99 programs	Yes- 99 programs
Batch Programs	Yes- 30/10	Yes- 30/10	Yes- 30/10	Yes- 30/10
Batch Pause	Yes	Yes	Yes	Yes
mm and inch format	Yes	Yes	Yes	Yes
Increments	0.010"/1mm	0.010"/1mm	0.010"/1mm	0.010"/1mm
Max. Length	9999"/mm	9999"/mm	9999"/mm	9999"/mm
Max. Count	9999	9999	9999	9999
Adjustable Speed	Yes	Yes	Yes	Yes
Feed Rate	1"-30"/sec.	1"-30"/sec.	1"-30"/sec.	1"-30"/sec.
Max. Wire Ga.	16 ga.	10 ga.	10 ga.	2 ga.
Blade Type	Guillotine	Guillotine	Guillotine	Guillotine
Safety Guard- Opening/Exit	Exit only	Exit only	Yes	Yes
Air Pressure required- psi.	NA	80 lbs.	80 lbs.	80 lbs.
Voltage required	120/1/60	120/1/60	120/1/60	120/1/60
E-Stop	No	No	Yes	Yes
Multi-cut capability	Yes	Yes	No	No
Tight Tolerance kit	No	Yes	No	No
Throat guide capability	Yes	Yes	No	No
Avail. Stainless Steel Wheels	Yes	Yes	Yes	Yes
Weight	25 lbs	38 lbs	55 lbs	55 lbs
Optical Sensor / Software	No	No	142 ONLY	Yes
Warranty - INDUSTRY BEST	2 yr. ltd	2 yr. ltd	2 yr. ltd.	2 yr. ltd

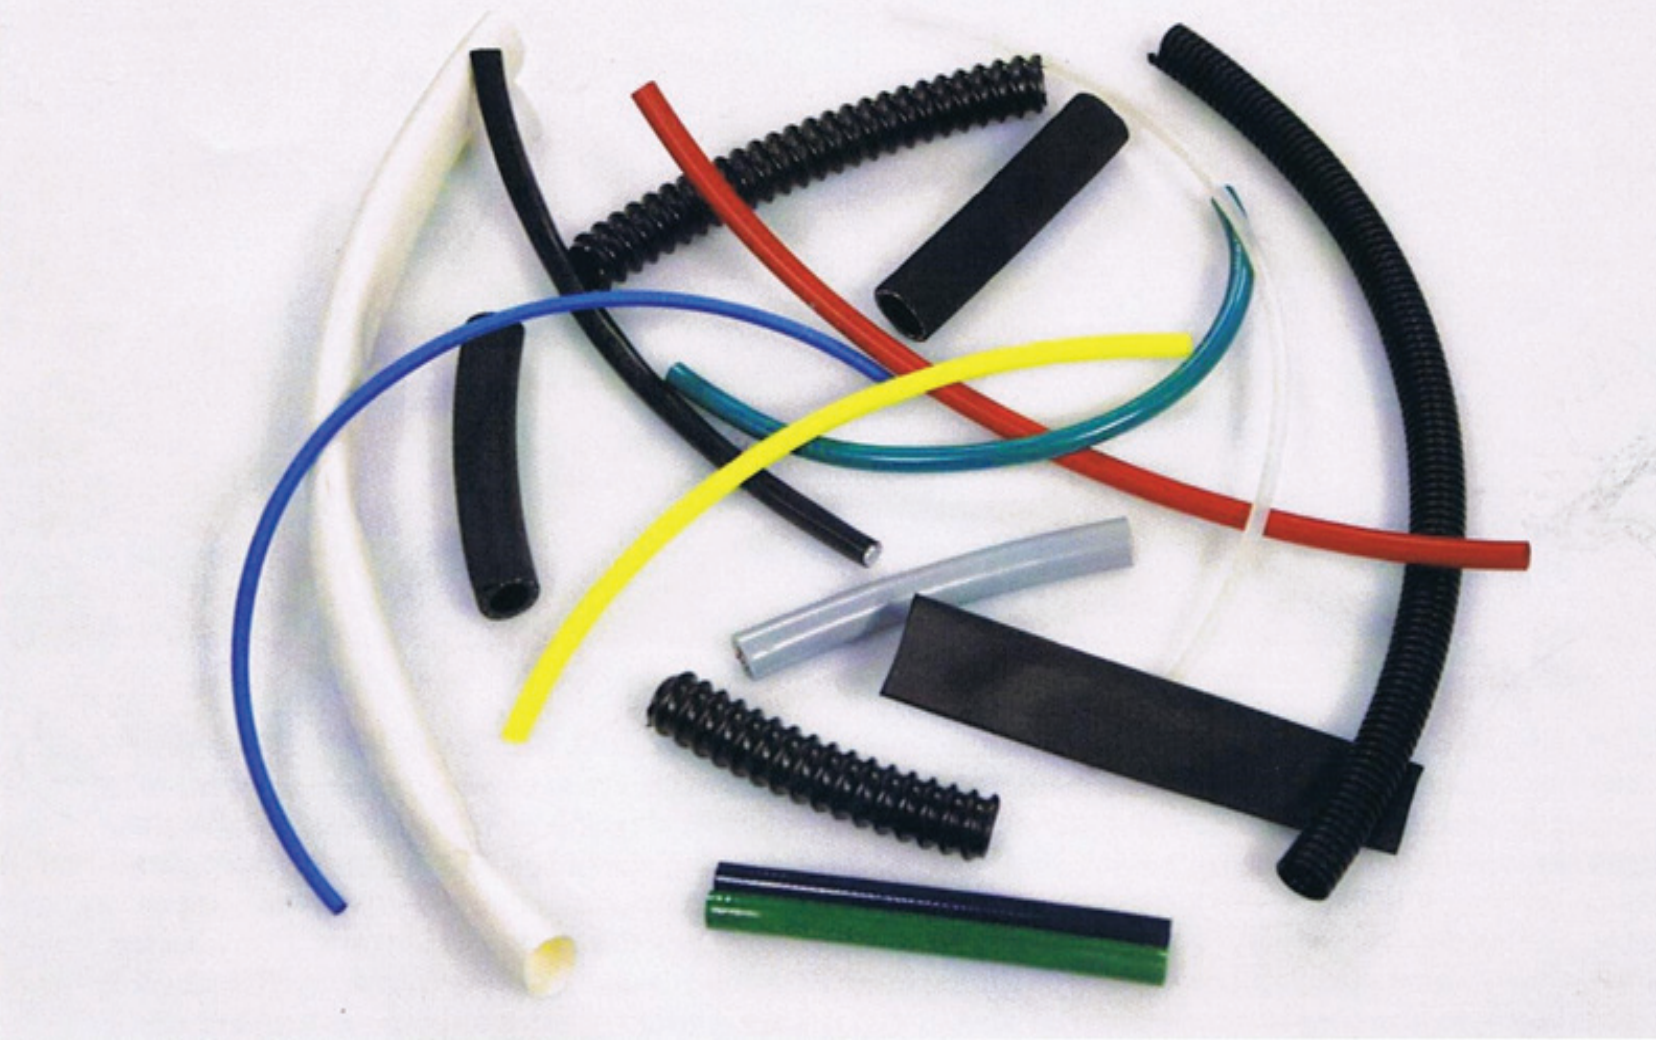

Rapid, Rugged, Reliable and Reasonable

SLICE™

SLICE™

SLICE 123



Perfect For Small Jobs

- All Electric
- Low Cost
- Simple To Use
- Small & Lightweight
- 3" (7.62cm) x .188" (.48cm) Input Guide
- High Mix / Irregular Use

SLICE 135



Production Volume Ready

- Electric / Pneumatic
- Cuts 1" (2.5cm) to 30" (76cm) per sec.
- Spring Loaded Drive Wheels
- Optional Tight Tolerance Kit
- Optional Multi-Cut System
- 3" (7.62cm) x .25" (.64cm) Input

****Two Year Warranty****

A Versatile Workhorse


- Electric / Pneumatic
- Adjustable Entry & Exit Wheels
- Safe & Easy To Use
- Programmable
- Quick Product Changeover
- 3" (7.62cm) x 1.5" (3.81cm) Input

Cuts It All and Is Heavy Duty

- Electric / Pneumatic
- Cuts Up To 2awg Wire
- Multiple Blade Configurations
- Quick Change Blade Design
- Easy Preventative Maintenance
- 3" (7.62cm) x 1.5" (3.81cm) Input



SLICE 141 / 142

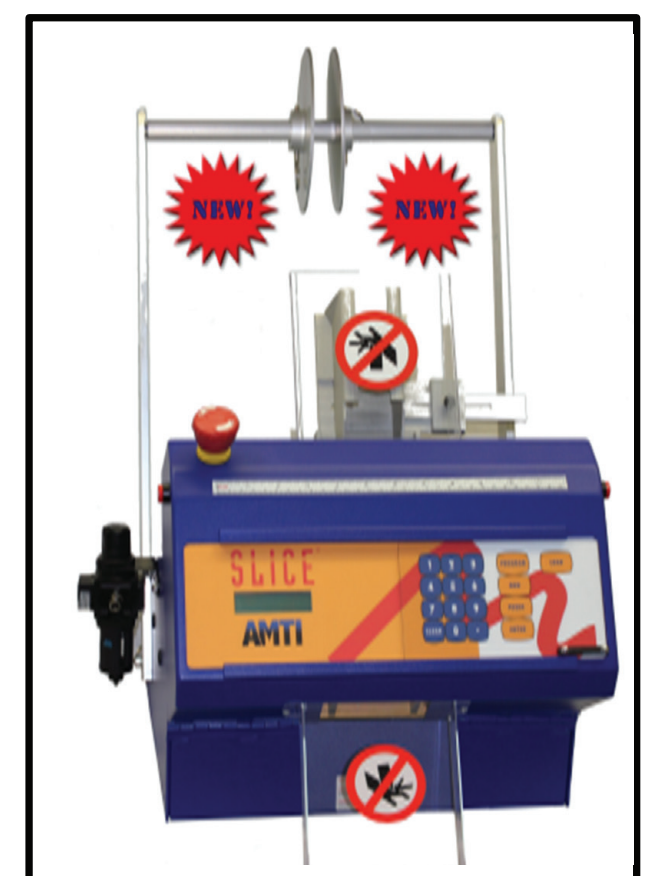

SLICE 150

Available for SLICE® 123 and 135 Only

- Increase efficiency, output and production
- Facilitates multiple-line cutting of up to 3-5 reels of material at the same time
- Guide assembly – choice of 3 or 5-Hole Aluminum Throat Guide
- Aluminum extrusion construction

Heat Shrink Conveyor Tunnel Oven

- Accurate Digital Speed Control
- Electronic Temperature Control
- Turbulent Air Flow system for fast processing
- Operating Oven Temperature Range:
100° F to 350° F
- Conveyor Speed: 1 to 100 inches per minute