



Multi-Cut System™

Standard Fixtures and Racks Available


- Increase efficiency, output and production
- Facilitates multiple-line cutting of up to 3-5 reels of material at the same time
- Guide assembly - choice of 3 or 5-Hole Aluminum Throat Guide
- Aluminum extrusion construction



THE SHRINK™

Heat Shrink Conveyor Tunnel Oven

- Accurate Digital Speed Control
- Electronic Temperature Control
- Turbulent Air Flow system for fast processing
- Operating Oven Temperature Range: 100° F to 350° F
- Conveyor Speed: 1 to 100 inches per minute

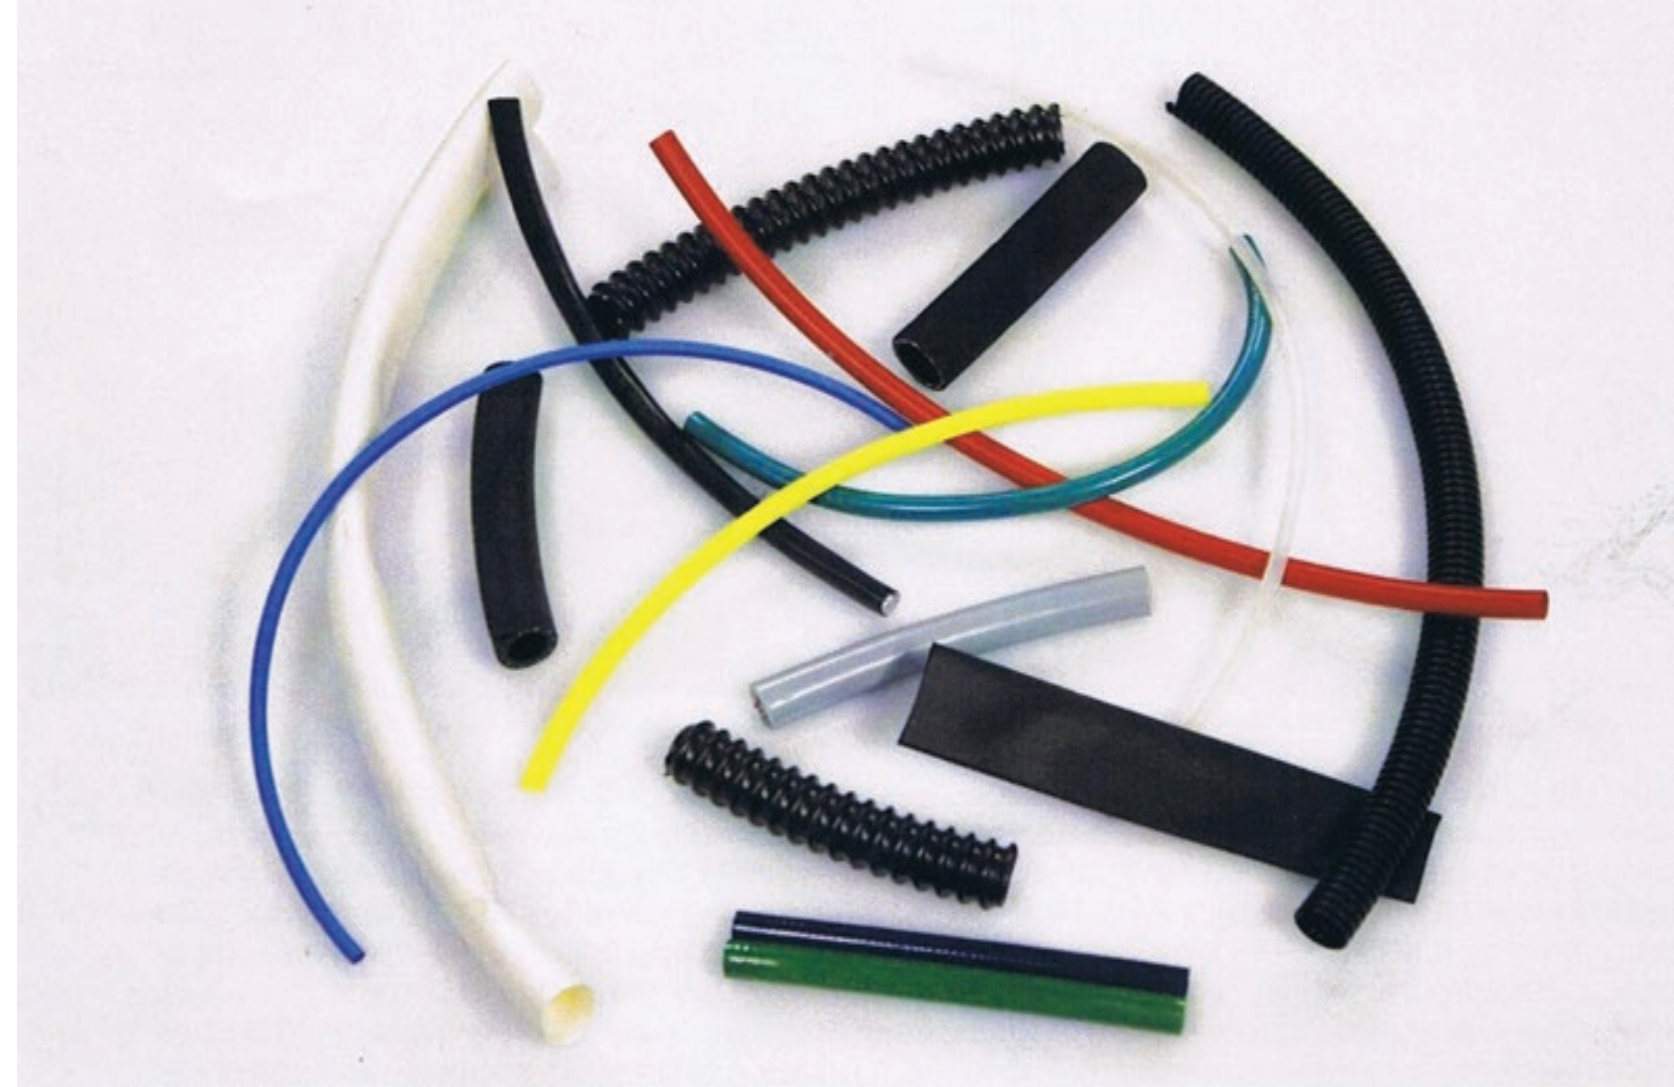

SLICE™ PRODUCT TECHNICAL SPECIFICATIONS

Technical Data	123	135	141/142	200
Adjustable Opening	No	No	Yes	Yes
Opening Width	3" (76.2mm)	3" (76.2mm)	3" (76.2mm)	3" (76.2mm)
Opening Height	0.25" (.64cm) fixed	0.25" (.64cm) fixed	1.5" (3.8cm) max/adj	1.5" (3.8cm) max/adj
Programmable	Yes-99 programs	Yes-99 programs	Yes-99 programs	Yes-150+ programs
Batch Programs	Yes -30/10	Yes -30/10	Yes -30/10	Yes -30/10
Batch Pause	Yes	Yes	Yes	Yes
MM and Inch Format	Yes	Yes	Yes	Yes
Increments	0.10"/1mm	0.10"/1mm	0.10"/1mm	0.10"/1mm
Max. Length	9999 inches or mm	9999 inches or mm	9999 inches or mm	9999 inches or mm
Max. Count	9999	9999	9999	9999
Adjustable Speed	Yes	Yes	Yes	Yes
Feed Rate	1"(2.54cm)-30"(76.2cm)/sec	1"(2.54cm)-30"(76.2cm)/sec	1"(2.54cm)-30"(76.2cm)/sec	1"(2.54cm)-30"(76.2cm)/sec
Max. Wire Ga.	14	10	10	2
Blade Type	Guillotine	Guillotine	Guillotine	Guillotine
Safety Guard – Opening/Exit	Exit only	Exit only	Yes	Yes
Air Pressure Required – psi	N/A	80lbs	80lbs	80lbs
Voltage Required	120/1/60	120/1/60	120/1/60	120/1/60
E-Stop	No	No	Yes	Yes
Multi-Cut System Option	Yes	Yes	No	Yes
Tight Tolerance Kit Option	No	Yes	No	No
Throat Guide Option	Yes	Yes	No	No
Stainless Steel Wheels Option	Yes	Yes	Yes	Yes
Weight	25lbs (11.4kg)	38lbs (17.2kg)	55lbs (25kg)	55lbs (25kg)
Optical Sensor/Software	No	No	142 ONLY	Yes
Warranty – *Industry Best*	2 YR LTD	2 YR LTD	2 YR LTD	2 YR LTD

Rapid, Rugged, Reliable and Reasonable

SLICE™



SLICE 123



Perfect For Small Jobs

- All Electric
- Low Cost
- Simple To Use
- Small & Lightweight
- 3" (7.62cm) x .188" (.48cm) Input Guide
- High Mix / Irregular Use

SLICE™

Production Volume Ready

- Electric / Pneumatic
- Cuts 1" (2.5cm) to 30" (76cm) per sec.
- Spring Loaded Drive Wheels
- Optional Tight Tolerance Kit
- Optional Multi-Cut System
- 3" (7.62cm) x .25" (.64cm) Input

SLICE 135



A Versatile Workhorse

- Electric / Pneumatic
- Adjustable Entry & Exit Wheels
- Safe & Easy To Use
- Programmable
- Quick Product Changeover
- 3" (7.62cm) x 1.5" (3.81cm) Input

****Two Year Warranty****

Application Specific Automation Capable

- User friendly HMI interface
- PLC programmable inputs and outputs
- Quick change 3" or 6" wide blade
- Heavy Duty cutter and blade assembly
- Automated throat height adjustment to 1.5"
- Extreme torque drive motor with 3 drive wheels
- Stick heat shrink mode with zero load and continuous feed



SLICE 141 / 142



SLICE 200